


## SKINTOP® DIX-M

SKINTOP® DIX-M, NBR multiple sealing inserts, higher packing density allows smaller part construction, easy insertion of several cables



UV-resistant

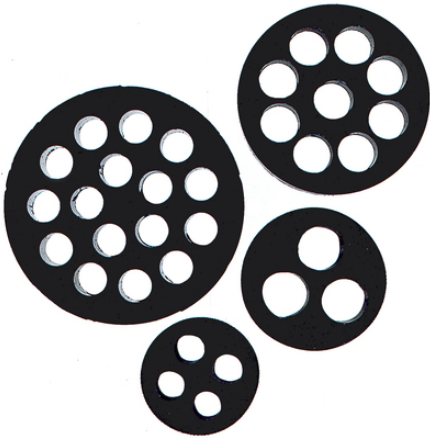

Temperature-resistant



Optimum strain relief



Assembly time



Kompletterande automationskomponenter från Lapp

### Benefits

Easy insertion of several cables into one gland  
Higher packing density allows smaller part construction

### Application range

For use in SKINTOP® cable glands.  
A sealing ring with several holes is used in place of the inner sealing insert.

### Note

IP 68 can be achieved when all openings are closed and all bores are optimally occupied, i.e. when using cables with nominal diameter and/or SKINTOP® DIX-DV sealing plugs

### Product Make-up

SKINTOP® DIX-M FKM is resistant to oil, water, alkaline solutions, acids, solvents etc.

Last Update (25.10.2018)

©2018 Lapp Group - Technical changes reserved

Product Management [www.lappkabel.de](http://www.lappkabel.de)

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02\_03.16

## SKINTOP® DIX-M

### Technical Data

Classification ETIM 5:	ETIM 5.0 Class-ID: EC000032 ETIM 5.0 Class-Description: Plug for cable screw gland
Classification ETIM 6:	ETIM 6.0 Class-ID: EC000032 ETIM 6.0 Class-Description: Plug for cable screw gland
On request:	Special shapes
Colour delivered:	Black, RAL 9005
Material:	NBR FKM
Protection rating:	IP 54

### Note

Photographs and graphics are not to scale and do not represent detailed images of the respective products.  
Prices are net prices without VAT and surcharges. Sale to business customers only.

**SKINTOP® DIX-M**

Article number	Article designation / size	Size M	Number of cables x cable Ø
SKINTOP® DIX-M			
53316220	16220	M 16	2 x 2.0
53316230	16230	M 16	2 x 3.0
53316240	16240	M 16	2 x 4.0
53316420	16420	M 16	4 x 2.0
53320250	20250	M 20	2 x 5.0
53320260	20260	M 20	2 x 6.0
53320340	20340	M 20	3 x 4.0
53320353	20353	M 20	3 x 5.3
53320440	20440	M 20	4 x 4.0
53320920	20920	M 20	9 x 2.0
53320430	20430	M 20	4 x 3.0
53325260	25260	M 25	2 x 6.0
53325250	25250	M 25	2 x 5.0
53325350	25350	M 25	3 x 5.0
53325360	25360	M 25	3 x 6.0
53325370	25370	M 25	3 x 7.0
53325450	25450	M 25	4 x 5.0
53325540	25540	M 25	5 x 4.0
53325640	25640	M 25	6 x 4.0
53332270	32270	M 32	2 x 7.0
53332280	32280	M 32	2 x 8.0
53332290	32290	M 32	2 x 9.0
53332370	32370	M 32	3 x 7.0
53332380	32380	M 32	3 x 8.0
53332460	32460	M 32	4 x 6.0
53332470	32470	M 32	4 x 7.0
53332560	32560	M 32	5 x 6.0
53332650	32650	M 32	6 x 5.0
53332840	32840	M 32	8 x 4.0
53332850	32850	M 32	8 x 5.0
53332940	32940	M 32	9 x 4.0
53340290	40290	M 40	2 x 9.0
53340310	40310	M 40	3 x 10.0
53340480	40480	M 40	4 x 8.0

Last Update (25.10.2018)

©2018 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

 You can find the current technical data in the corresponding data sheet.  
 PN 0456 / 02\_03.16

**SKINTOP® DIX-M**

Article number	Article designation / size	Size M	Number of cables x cable Ø
53340490	40490	M 40	4 x 9.0
53340580	40580	M 40	5 x 8.0
53340590	40590	M 40	5 x 9.0
53340670	40670	M 40	6 x 7.0
53340860	40860	M 40	8 x 6.0
53340969	40969	M 40	9 x 6.9
53350118	50118	M 50	11 x 8.0
53350680	50680	M 50	6 x 8.0
53350780	50780	M 50	7 x 8.0
53350870	50870	M 50	8 x 7.0
53350147	50147	M 50	14 x 7.0
53350164	50164	M 50	16 x 4.0
53350166	50166	M 50	16 x 6.0
SKINTOP® DIX-M FKM			
53420250	20250	M 20	2 x 5.0
53420260	20260	M 20	2 x 6.0
53440969	40969	M 40	9 x 6.9

Last Update (25.10.2018)

©2018 Lapp Group - Technical changes reserved

Product Management [www.lappkabel.de](http://www.lappkabel.de)You can find the current technical data in the corresponding data sheet.  
PN 0456 / 02\_03.16